




# ELPRESS®

## Product Datasheet

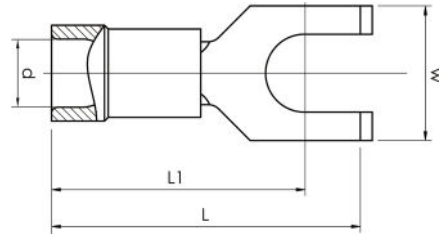

### Flanged fork terminals 0.5 - 2.5 mm<sup>2</sup>

| mm <sup>2</sup> (Cu) | AWG Cu | Name    | Screw | W (mm) | d   | L    | L1   | t   | s | Tool    | Insulation material | Easy Entry | Material  | Pcs/pack | Tool    |
|----------------------|--------|---------|-------|--------|-----|------|------|-----|---|---------|---------------------|------------|-----------|----------|---------|
| 0,5-1,5              | 20-16  | A1537GB | M3,5  | 6,2    | 4   | 21   | 17,5 | 0,7 | 7 | GSA0760 | PC                  | Yes        | Cu, Cu/Sn | 100      | GSA0760 |
| 0,5-1,5              | 20-16  | A1543GB | M4    | 6,2    | 4   | 21   | 17,5 | 0,7 | 7 | GSA0760 | PC                  | Yes        | Cu, Cu/Sn | 100      | GSA0760 |
| 1,5-2,5              | 16-14  | A2543GB | M4    | 6,2    | 4,5 | 21   | 17,5 | 0,8 | 7 | GSA0760 | PC                  | Yes        | Cu, Cu/Sn | 100      | GSA0760 |
| 1,5-2,5              | 16-14  | A2553GB | M5    | 9      | 4,5 | 22,5 | 17,5 | 0,8 | 7 | GSA0760 | PC                  | Yes        | Cu, Cu/Sn | 100      | GSA0760 |

t = palm thickness, s = strip length



# ELPRESS®