




ELPRESS®

Product Datasheet

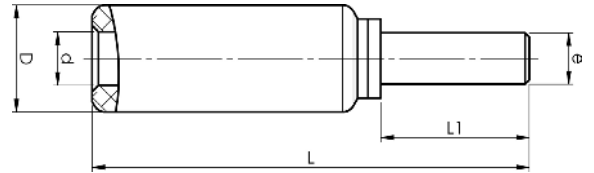

Aluminium-copper pin sockets 16 - 300 mm²

| Stranded Al mm ² | Solid Al mm ² | AWG Al (Stranded) | AWG Al (Solid Al) | Name | d (mm) | D | e | L | L1 | s | Pcs/ pack | Tool |
|--------------------------------|-----------------------------|----------------------|----------------------|--------|--------|----|----|-------|----|----|--------------|-------------------|
| 16 | 25 (16) | 6 | 4 | AKP16 | 5,9 | 13 | 6 | 56 | 25 | 29 | 48 | V600, V1300, V250 |
| 25 | 35 | 4 | 2 | AKP25 | 6,8 | 13 | 6 | 56 | 25 | 29 | 48 | V600, V1300, V250 |
| 35 | 50 | 2 | 1/0 | AKP35 | 8,5 | 20 | 9 | 78 | 25 | 45 | 24 | V1300, V250 |
| 50 | 70 | 1/0 | 2/0 | AKP50 | 9,6 | 20 | 9 | 88 | 35 | 45 | 24 | V1300, V250 |
| 70 | 95 | 2/0 | 4/0 | AKP70 | 11,3 | 20 | 9 | 88 | 35 | 45 | 24 | V1300, V250 |
| 95 | 120 | 4/0 | 250 | AKP95 | 12,5 | 25 | 12 | 103 | 35 | 60 | 24 | V1300, V250 |
| 120 | 150 | 250 | 300 | AKP120 | 14 | 25 | 12 | 108 | 40 | 60 | 24 | V1300, V250 |
| 150 | 185 | 300 | 350 | AKP150 | 15,8 | 25 | 12 | 108 | 40 | 60 | 24 | V1300, V250 |
| 185 | 240 | 350 | 500 | AKP185 | 17,6 | 32 | 14 | 113,5 | 45 | 60 | 12 | V1300, V250 |
| 240 | | 500 | | AKP240 | 19,8 | 32 | 14 | 113,5 | 45 | 61 | 12 | V1300, V250 |
| 300 | | 600 | | AKP300 | 22 | 36 | 16 | 142 | 50 | 83 | 9 | V250 |

s = strip length



ELPRESS®