




# ELPRESS®

## Product Datasheet

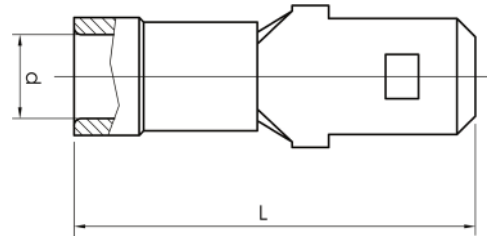

### Tabs 0.5 - 6 mm<sup>2</sup>

| mm <sup>2</sup><br>(Cu) | AWG Cu | Name   | d   | L    | s | Tab     | Tool    | Insulation<br>material | Neck type            | Easy<br>Entry | Material     | Pcs/<br>pack | Tool    |
|-------------------------|--------|--------|-----|------|---|---------|---------|------------------------|----------------------|---------------|--------------|--------------|---------|
| 0,5-1,5                 | 20-16  | A1507H | 4,1 | 22   | 7 | 6,3x0,8 | GSA0760 | PC                     | Brazed               | Yes           | Brass, Cu/Sn | 100          | GSA0760 |
| 1,5-2,5                 | 16-14  | A2507H | 5   | 22,5 | 8 | 6,3x0,8 | GSA0760 | PC                     | Brazed               | Yes           | Brass, Cu/Sn | 100          | GSA0760 |
| 4-6                     | 12-10  | A4607H | 6,6 | 24,5 | 9 | 6,3x0,8 | GSA0760 | PA                     | Reinforcement sleeve | No            | Brass, Cu/Sn | 100          | GSA0760 |

s = strip length



# ELPRESS®