




# ELPRESS®

## Product Datasheet

### Through connectors with aluminium partitions with different areas 16 - 400 mm<sup>2</sup>

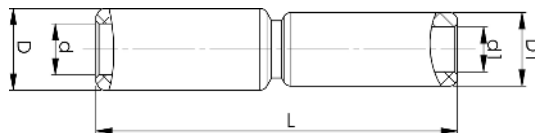

Stranded Al mm <sup>2</sup>	Solid Al mm <sup>2</sup>	AWG Al (Stranded)	AWG Al (Solid Al)	Name	d	d1	D	D1	L	s	s1	Pcs/pack	Tool
25-16	35-25	4-6	2-4	AS25-16	6,8	5,9	13	13	67	29	29	48	V1300, V250
35-25	50-35	2-4	1/0-4	AS35-25	8,5	6,8	20	13	85	45	29	24	V1300, V250
50-25	70-35	1/0-4	2/0-4	AS50-25	9,6	6,8	20	13	85	45	29	24	V1300, V250
50-35	70-50	1/0-2	2/0	AS50-35	9,6	8,5	20	20	100	45	45	24	V1300, V250
70-50	95-70	2/0-1/0	4/0-2/0	AS70-50	11,3	9,6	20	20	100	45	45	24	V1300, V250
95-25	120-35	4/0-4	2-250	AS95-25	12,5	6,8	25	13	101,1	60	29	24	V1300, V250
95-35	120-50	4/0-2	1/0-250	AS95-35	12,5	8,5	25	20	116	60	45	24	V1300, V250
95-50	120-70	3/0-1/0	250-2/0	AS95-50	12,5	9,6	25	20	116,1	60	45	24	V1300, V250
95-70	120-95	4/0-2/0	250-4/0	AS95-70	12,5	11,3	25	20	116,1	60	45	24	V1300, V250
120-95	150-120	250-4/0	300-250	AS120-95	14	12,5	25	25	130	60	60	12	V1300, V250
150-50	185-70	250-1/0	350-2/0	AS150-50	15,8	9,6	25	20	116,1	60	45	12	V1300, V250
150-70	185-95	300-2/0	350-3/0	AS150-70	15,8	11,3	25	20	116,1	60	45	24	V1300, V250
150-95	185-120	300-4/0	350-250	AS150-95	15,8	12,5	25	25	130	60	60	12	V1300, V250
150-120	185-150	300-250	350-300	AS150-120	15,8	14	25	25	130	60	60	12	V1300, V250
185-95	240-120	350-4/0	500-250	AS185-95	17,6	12,5	32	25	131,9	61	60	12	V1300, V250
185-150	240-185	350-300	500-350	AS185-150	17,6	15,8	32	25	131,9	61	60	12	V1300, V250
240-95	120	500-4/0	600-250	AS240-95	19,8	12,5	32	25	132	61	60	12	V1300, V250
240-120	150	500-250	300	AS240-120	19,8	14	32	25	132	61	60	12	V1300, V250
240-150	185	500-300	350	AS240-150	19,8	15,8	32	25	132	61	60	12	V1300, V250
240-185	240	500-350	500	AS240-185	19,8	17,6	32	32	131	61	61	12	V1300, V250
300-240		600-500		AS300-240	22	19,8	36	32	155,1	83	61	6	V250
400-300		750-600		AS400-300	25	22	40	36	179	83	83	3	V250

s, s1 = insulation stripping length



# ELPRESS®