




ELPRESS®

Product Datasheet KS/KSF through connectors with partition 10-500 mm²

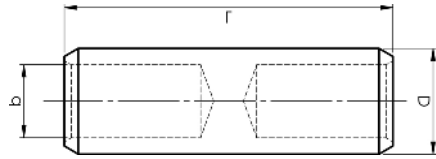

mm ² (Cu)	AWG Cu	Name	Screen conductor	d (mm)	D	L	s	Die	Pcs/pack	Tool
10	8	KS10M		5	8	36	18	8	100	ES2258, PVL350, V600, DV1300
16	6	KSF16M	15	6	9	37	18	9	100	ES2258, PVL350, V600, DV1300
25	4	KSF25M	21-29	8	11	38	18	11	100	ES2258, PVL350, V600, DV1300
35	2	KSF35M	41	9	13	41	19	13	100	PVL350, V600, DV1300, DV250
50	1/0	KSF50M	57	11	14,5	48	22	14,5	50	PVL350, V600, DV1300, DV250
70	2/0	KSF70M	72-88	13	17	49	22	17	50	PVL350, V600, DV1300, DV250
95	3/0	KSF95M	111	15	20	56	25	20	50	V600, DV1300, DV250
120	250	KSF120M		17	22	63	28	22	50	V600, DV1300, DV250
150	300	KSF150M		19	25	64	28	25	25	V600, DV1300, DV250
185	350	KSF185M		21	27	74	32	27	25	DV1300, DV250
240	500	KSF240AM		22,5	29	76	32	30	1	DV1300, DV250
300	600	KSF300AM		24,5	31,5	88	37	32	1	DV1300, DV250
400	750	KSF400AM		30	38	105	45	38	1	DV1300, DV250
500	1000	KSF500M		33	42	135	54	42	1	DV250, V1470

s = strip length



ELPRESS®