




# ELPRESS®

## Product Datasheet

Pre-insulated TWIN-end terminals 2 x 0.5 - 2 x 10 mm<sup>2</sup>, ETW2, alternative colour code

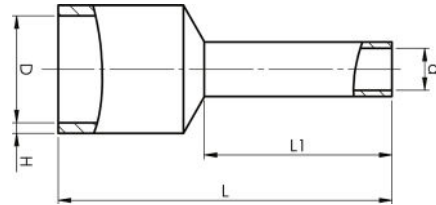

mm <sup>2</sup> (Cu)	AWG Cu	Name	d (mm)	D	H	L	L1	s	Tool	Material	Pcs/pack
2 x 0,5	2x20	A0,5-6ETW2	1,5	4,5	2,3	13	6	8	PEB0110T	Cu, Cu/Sn	500
2 x 0,5	2x20	A0,5-8ETW2	1,5	4,5	2,3	15	8	10	PEB0110T	Cu, Cu/Sn	500
2 x 0,75	2x20	A0,75-8ETW2	1,8	5,1	2,6	15	8	10	PEB0110T	Cu, Cu/Sn	500
2 x 0,75	2x20	A0,75-10ETW2	1,8	5,1	2,6	17	10	12	PEB0110T	Cu, Cu/Sn	500
2 x 0,75	2x20	A0,75-12ETW2	1,8	5,1	2,6	19	12	14	PEB0110T	Cu, Cu/Sn	500
2 x 1	2x18	A1-8ETW2	2	5,1	3	15	8	10	PEB0110T	Cu, Cu/Sn	500
2 x 1	2x18	A1-10ETW2	2	5,1	3	17	10	12	PEB0110T	Cu, Cu/Sn	500
2 x 1	2x18	A1-12ETW2	2	5,1	3	19	12	14	PEB0110T	Cu, Cu/Sn	500
2 x 1,5	2x16	A1,5-8ETW2	2,3	6,4	3,5	16	8	10	PEB0110T	Cu, Cu/Sn	500
2 x 1,5	2x16	A1,5-12ETW2	2,3	6,4	3,5	20	12	14	PEB0110T	Cu, Cu/Sn	500
2 x 2,5	2x14	A2,5-10ETW2	2,9	7,5	4	18,5	10	12	PEB0110T	Cu, Cu/Sn	250
2 x 2,5	2x14	A2,5-13ETW2	2,9	7,5	4	21,5	13	15	PEB0110T	Cu, Cu/Sn	250
2 x 4	2x12	A4-12ETW2	3,8	8,6	4,9	23	12	14	GEB4010C-TWIN, PEB0110T	Cu, Cu/Sn	100
2 x 4	2x12	A4-18ETW2	3,8	8,6	4,9	26	18	20	GEB4010C-TWIN, PEB0110T	Cu, Cu/Sn	100
2 x 6	2x10	A6-14ETW2	4,6	9,6	5,8	25	14	16	GEB4010C-TWIN, PEB0110T	Cu, Cu/Sn	100
2 x 6	2x10	A6-18ETW2	4,6	9,6	5,8	29	18	20	GEB4010C-TWIN, PEB0110T	Cu, Cu/Sn	100
2 x 10	2x8	A10-14ETW2	6,5	12,6	7	26	14	16	GEB4010C-TWIN	Cu, Cu/Sn	100

s = strip length

Use the tool socket closest to the total area of the sleeve.



# ELPRESS®